# AIRLOCKER ARB

## AIR OPERATED LOCKING DIFFERENTIAL

RD99

Ford 9",35 SPL,2" BRNG

#### **PARTS LIST**

ITEM #	QTY	DESCRIPTION	PART #	NOTES
01	1	TAPERED ROLLER BEARING	NOT SUPPLIED	
02	1	FLANGE CAP KIT	027333SP	3
03	1	SPLINED SIDE GEAR	SEE NOTE	2
04	1	SPIDER BLOCK	070201SP	
05	1	LONG CROSS SHAFT	060204SP	
06	1	SIDE GEAR	SEE NOTE	2
07	1	COUNTERSUNK SCREW (PK OF 2)	200213SP	
08	1	RETAINING PIN KIT (PK OF 2)	120701SP	
09	1	TAPERED ROLLER BEARING	NOT SUPPLIED	
10	1	SEAL HOUSING RETAINING CLIP	150601SP	
11	1	SEAL HOUSING KIT	081901SP	
12	1	SEAL HOUSING O-RINGS (PK OF 2)	160207SP	1
13	1	ADJUSTER NUT	100105SP	
14	1	BONDED SEAL	160703SP	
15	1	CLUTCH GEAR & WAVESPRING KIT	050904SP	
16	1	WAVESPRING	150704SP	
17	2	SIDE GEAR THRUST WASHER	SEE NOTE	4
18	2	SHORT CROSS SHAFT	060403SP	
19	4	PINION GEAR	SEE NOTE	2
20	4	PINION THRUST WASHER	SEE NOTE	4
21	1	DIFFERENTIAL CASE	012205SP	
*	1	BULKHEAD FITTING KIT (BANJO TYPE)	170114	5
*	1	AIR LINE (6mm DIA X 6m LONG)	170314	5
*	1	SOLENOID VALVE (12V)	180103	
*	1	SWITCH	180209SP	
*	1	SWITCH COVER (FRONT)	180210SP	
*	1	SWITCH COVER (REAR)	180211SP	
*	1	CABLE TIE (PK OF 25)	180305	
*	1	<b>OPERATING &amp; SERVICE MANUAL</b>	210200	
*	1	INSTALLATION GUIDE	210299	

\* Not illustrated in exploded view

#### NOTES

- 1 For replacement O-rings use only BS136 Viton 75.
- 2 Available only as complete 6 gear set # 728H031.
- 3 Use Trac-Lok LSD bolts with 5/8" head to suit.
- 4 Available only as complete thrust washer kit #730H01
- 5 All diffs produced before serial #17070001 came with 5mm air connection system. For information contact ARB.
- For the 31 spline Ford 9" refer to RD119 (Section 2.119).
- Refer to seal housing set-up tech note (Section 5.2).
- RD99 does not suit the OEM third member. Aftermarket third member with carrier bearing

ID of 50.80mm [2.000"] and a bearing thickness of 21.59mm [0.850"] must be used.




# AIRLOCKER ARB

## AIR OPERATED LOCKING DIFFERENTIAL

### RD99

Ford 9",35 SPL,2" BRNG

### **EXPLODED DIAGRAM**

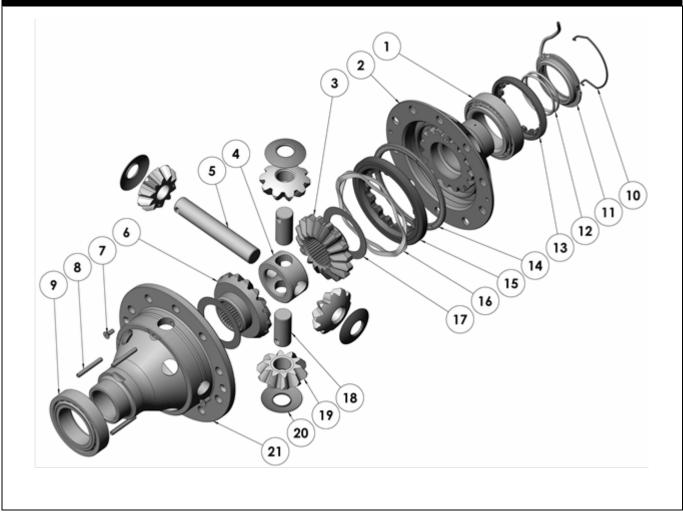

### **SPECIFICATIONS**

Axle Spline Ratio Supported Ring Gear ID Ring Gear Bolts Bing Gear Tarries	35 tooth, Ø38.1mm [1.50"] All 127.0mm [5.00"] 229mm [9"] 10 bolts on Ø152mm [6.00"]	
Ring Gear Torque	95Nm [70 ft-lb]	
OEM Backlash	0.25-0.41mm [0.010-0.016"]	
Non-OEM Backlash Bearing Cap Torgue	0.18-0.25mm [0.007-0.010"] 81Nm [60 ft-lb]	
Bearing oup rorque		

ARB Corporation Ltd • 42-44 Garden St Kilsyth VIC 3137 Australia ARB 4X4 Accessories USA • 720 SW 34<sup>th</sup> St Renton WA 98057 USA Australia & International Customer Service • +61 3 9761 6622 North America Customer Service • Toll Free 866 293 9078 www.arb.com.au (*AUS & Int*) www.arbusa.com (*N. America*)

